

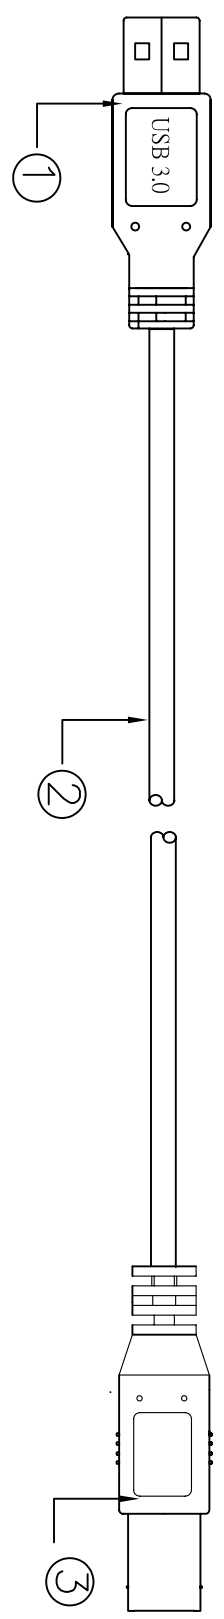


ISSUE	DESCRIPTION	DATE
1	OFFICIAL RELEASED	

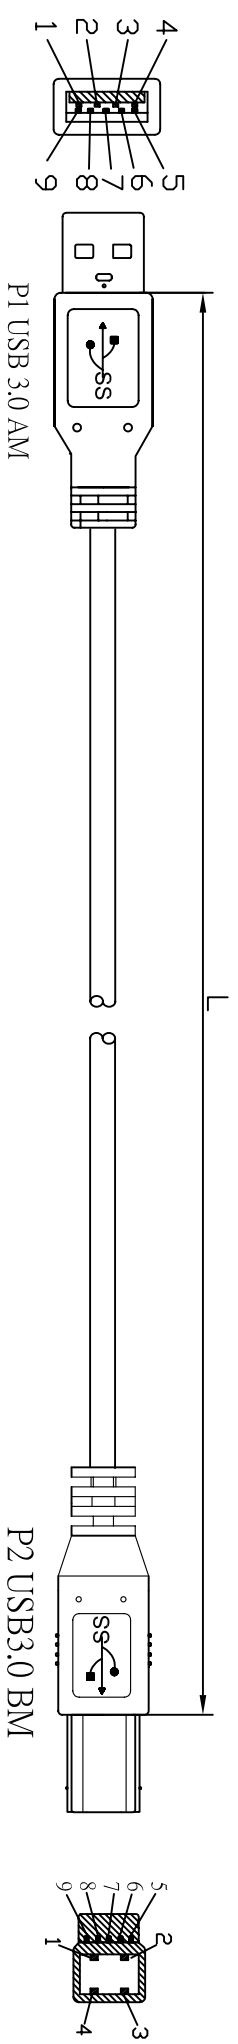

Connection

P1	1	2	3	4	5	6	7	8	9	Shell
										Braid
P2	1	2	3	4	5	6	7	8	9	Shell



"L" mm	Tolerance (mm)	P/N
1800	±30	CCP-USB3-AMBM-6
3000	±30	CCP-USB3-AMBM-10


Cable Spec:  
 1. Conductor:  
 (28#/1P Cu+D+AL) \*2F+28#/1PCu+26#/2CCu+AL+B  
 2. Coat: PVC Blue.  
 3. OD: 6.0±0.2mm  
 Package: Polybag with Gembird logo

ITEM	DESCRIPTION	QTY	UNIT	ITEM	DESCRIPTION	QTY	UNIT
③	USB3.0 BM plug	1	SET				
②	USB3.0 Cable, blue						
①	USB3.0 AM plug	1	SET				

# Gembird Electronics Ltd.

Draw	Long	TITLE:	DWG NO:
Date	2010.10.11	USB3.0 AM/BM Cable	
Check		P/N:	CUSTOMER:
Date		<b>CCP-USB3-AMBM-xx</b>	

UNIT:	MM	SCALE:	NONE	EDITION:	1	CUSTOMER:	
TOLERANCE:		WHOLE NO	±0.5	ANGLE	±0.5°	SH	1 DF 1 A4



3

2

1

3

2

1