


S3003 FUTABA SERVO

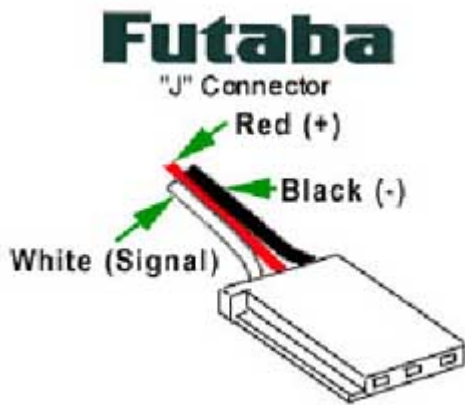

...S3003 FUTABA SERVO...

Detailed Specifications

Control System:	+Pulse Width Control 1520usec Neutral	Current Drain (4.8V):	7.2mA/idle
Required Pulse:	3-5 Volt Peak to Peak Square Wave	Current Drain (6.0V):	8mA/idle
Operating Voltage:	4.8-6.0 Volts	Direction:	Counter Clockwise/Pulse Traveling 1520-1900usec
Operating Temperature Range:	-20 to +60 Degree C	Motor Type:	3 Pole Ferrite
Operating Speed (4.8V):	0.23sec/60 degrees at no load	Potentiometer Drive:	Indirect Drive
Operating Speed (6.0V):	0.19sec/60 degrees at no load	Bearing Type:	Plastic Bearing
Stall Torque (4.8V):	44 oz/in. (3.2kg.cm)	Gear Type:	All Nylon Gears
Stall Torque (6.0V):	56.8 oz/in. (4.1kg.cm)	Connector Wire Length:	12"
Operating Angle:	45 Deg. one side pulse traveling 400usec	Dimensions:	1.6" x 0.8"x 1.4" (41 x 20 x 36mm)
360 Modifiable:	Yes	Weight:	1.3oz. (37.2g)